

RH-A / RK-A

Revolving Warning Light



Optional Rubber Gasket SZ-200A



Bulb



Terminal

90dB at 1m
(RHB and RKB Types)

Electronic Sound 1
(RHB and RKB Types)

∅100

IP55 With SZ-200A


Compact Revolving Warning Light featuring high durability and easy wiring with terminal block.

- Integral Rotating Parabolic Reflector: For enhanced visibility from a distance.
- Extended Bulb Life: Vibration-resistant automobile bulb.
- Built-in Alarm: Built-in audible alarm up to 90dB at 1m for RHB/RKB.
- Installation: Indoors—upright, inverted, sideways; Outdoors—upright only.
- Terminal Block: For easy wiring.
- Main Body: Impact and heat resistant ABS resin.
- Dome: Superior impact and heat resistant polycarbonate resin.
- CE Compliant: 12V DC, 24V DC type only.
- Available Colors: Red, Amber, Green, Blue.
- AUL type comes with rubber gasket SZ-200A.

Available by Special Order (RH type)

- Silver Color Body.
- UL type (E215660).

Dimensions

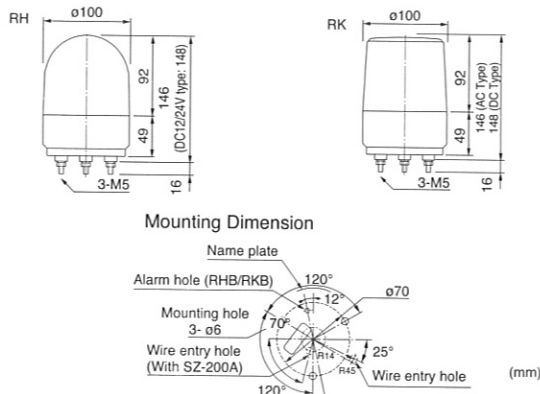

RH-A / RK-A Type

Model	Rated Voltage	Current	Rotations per Minute	Bulb	No.	Mass
RH/RHB/RK/RKB-12A (UL)	12V DC	0.8A	170	12V10W	9	0.4kg
RH/RHB/RK/RKB-24A (UL)	24V DC	0.5A		24V10W	10	
RH/RHB/RK/RKB-100A (UL)	100V DC	0.065A		12V5W	12	0.6kg
RH/RHB/RK/RKB-120A (UL)	120V AC	0.1A				
RH/RHB/RK/RKB-200A	200V AC	0.03A				
RH/RHB/RK/RKB-240A (UL)	240V AC	0.05A				

Bulb...G18 BA15S

RH-A / RK-A