

KX

Signal Light

c  us

Xenon 

∅100

IP55 With SZ-200A



Optional Rubber Gasket SZ-200A


Xenon Signal Light featuring superior night-time visibility and adjustable flashing cycle.

- Newly Developed Prism Cut Lens: For bright illumination and improved visibility from all directions.
- Extended Bulb Life: Shock resistant xenon, even under severe vibration.
- Installation: Upright, inverted and sideways for indoors only.
- Main Body: Impact and heat resistant ABS resin.
- Lens: Superior impact and heat resistant polycarbonate resin for superior durability and light transmission.
- Superior Visibility: Intensive flashing using a xenon lamp (night-time visibility: 1,000m or more).
- Flashing Cycle: Adjustable between 30~90 times/minute.
- IP55 with the optional Rubber gasket SZ-200A (IP23 without SZ-200A).
- Available Colors: Red, Amber, Green, Blue.

Available by Special Order

- Silver Color Body.
- UL type (E215660).

Dimensions

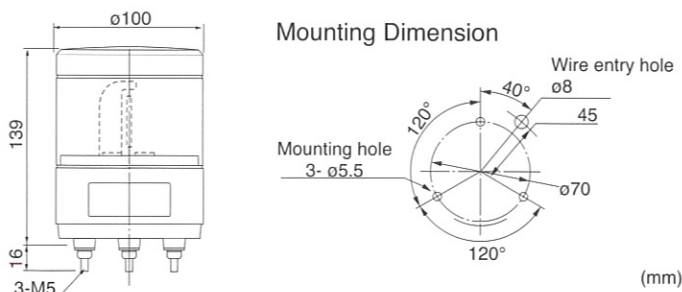

KX Type

Model	Rated Voltage	Power Consumption	Rush Current	Flashes per Minute
KX-12	12V DC	8W	—	30~90
KX-24	24V DC			
KX-100	100V AC	4W	10A	
KX-120	120V AC			
KX-220	220V AC		21A	
KX-230	230~240V AC			

Inrush current of this product is very high. Please check the outer contact capacity.