


WIRING		
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	3/8/206	JJH

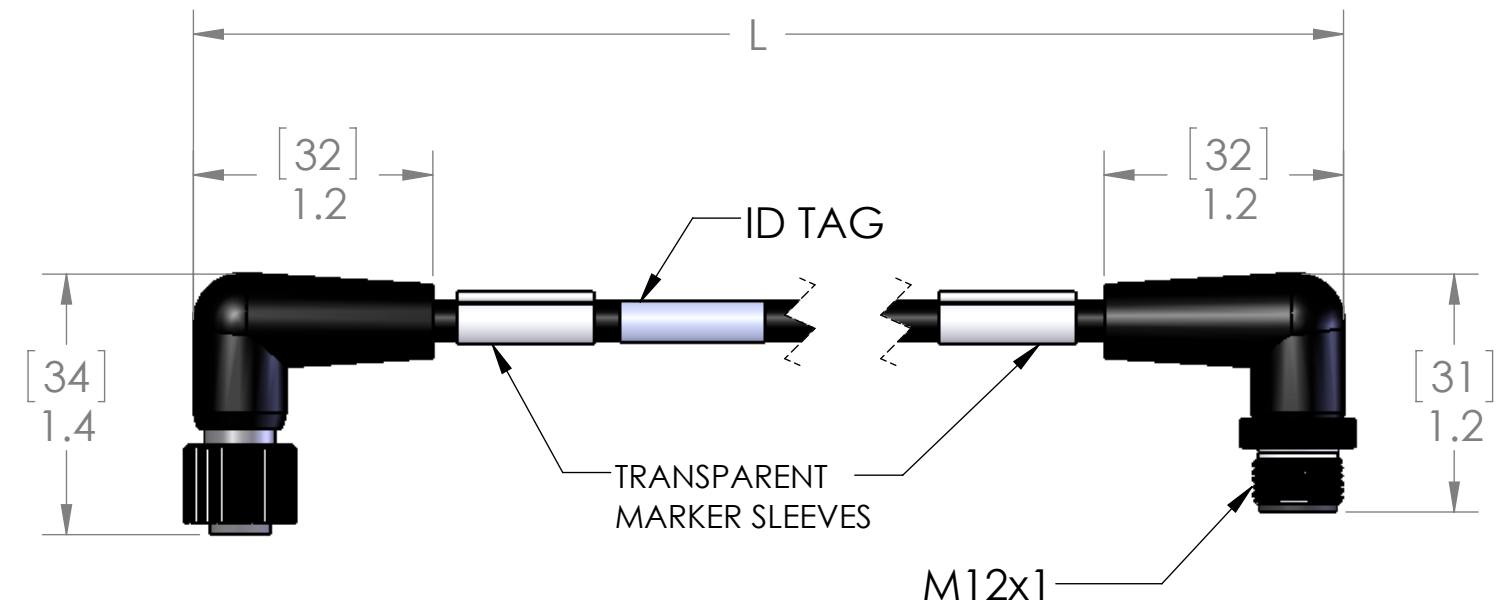

M12x1
FEMALE
THREAD

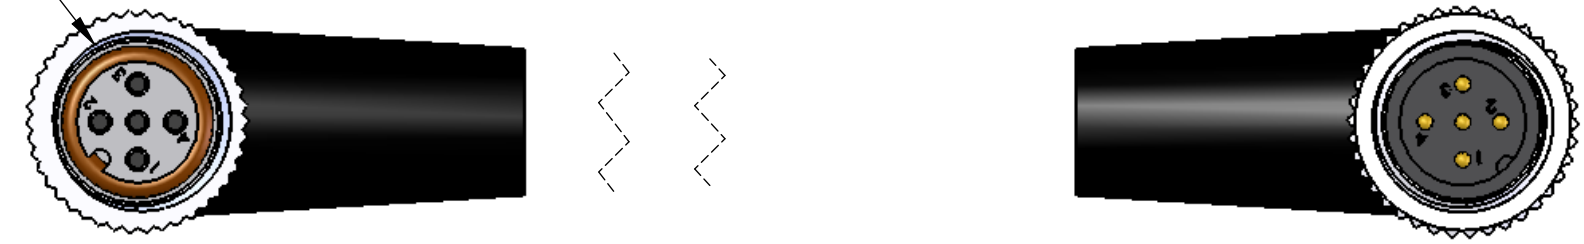


TABLE A	
P/N	L
MDCWF-5MFP-0.3M-R-B-SB50	12" [0.3M]
MDCWF-5MFP-1M-R-B-SB50	40" [1M]
MDCWF-5MFP-2M-R-B-SB50	79" [2M]
MDCWF-5MFP-3M-R-B-SB50	118" [3M]
MDCWF-5MFP-4M-R-B-SB50	157" [4M]
MDCWF-5MFP-5M-R-B-SB50	197" [5M]
MDCWF-5MFP-6M-R-B-SB50	236" [6M]
MDCWF-5MFP-8M-R-B-SB50	315" [8M]
MDCWF-5MFP-10M-R-B-SB50	393" [10M]
MDCWF-5MFP-15M-R-B-SB50	590" [15M]
MDCWF-5MFP-20M-R-B-SB50	786" [20M]
MDCWF-5MFP-25M-R-B-SB50	983" [25M]
MDCWF-5MFP-30M-R-B-SB50	1179" [30M]

MATERIALS	
BODY:	BLACK TPE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/5 CONTINUOUS FLEX BLACK TPE JACKET. 20MM FLEXES, MAX BEND RADIUS IS 10x CABLE O.D.
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

NAME		MENCOM CORPORATION	
DRAWN	BEM	TITLE:	
CHECKED		5 PL HI FLEX MDC R/A M-F EXT	
ENG APPR.		SIZE	DWG. NO.
MFG APPR.		B	MDCWF-5MFP-ZZ-R-B-SB50
Q.A.		REV	A
COMMENTS:		SCALE: 1:1	WEIGHT:
		SHEET 1 OF 1	