
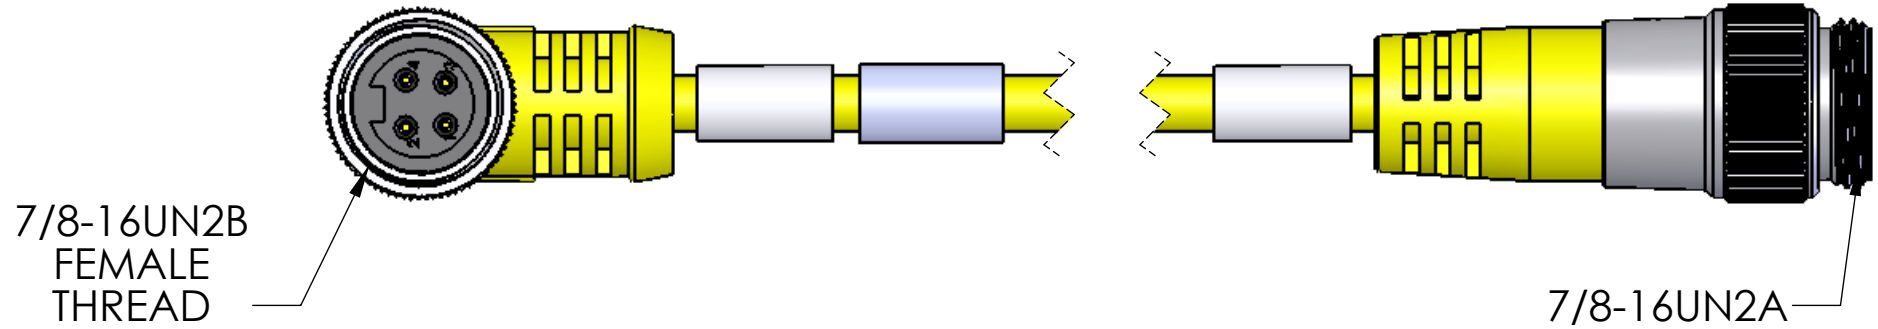


WIRING

- 1 - 1
- 2 - 2
- 3 - 3
- 4 - 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	3/14/2016	JJH

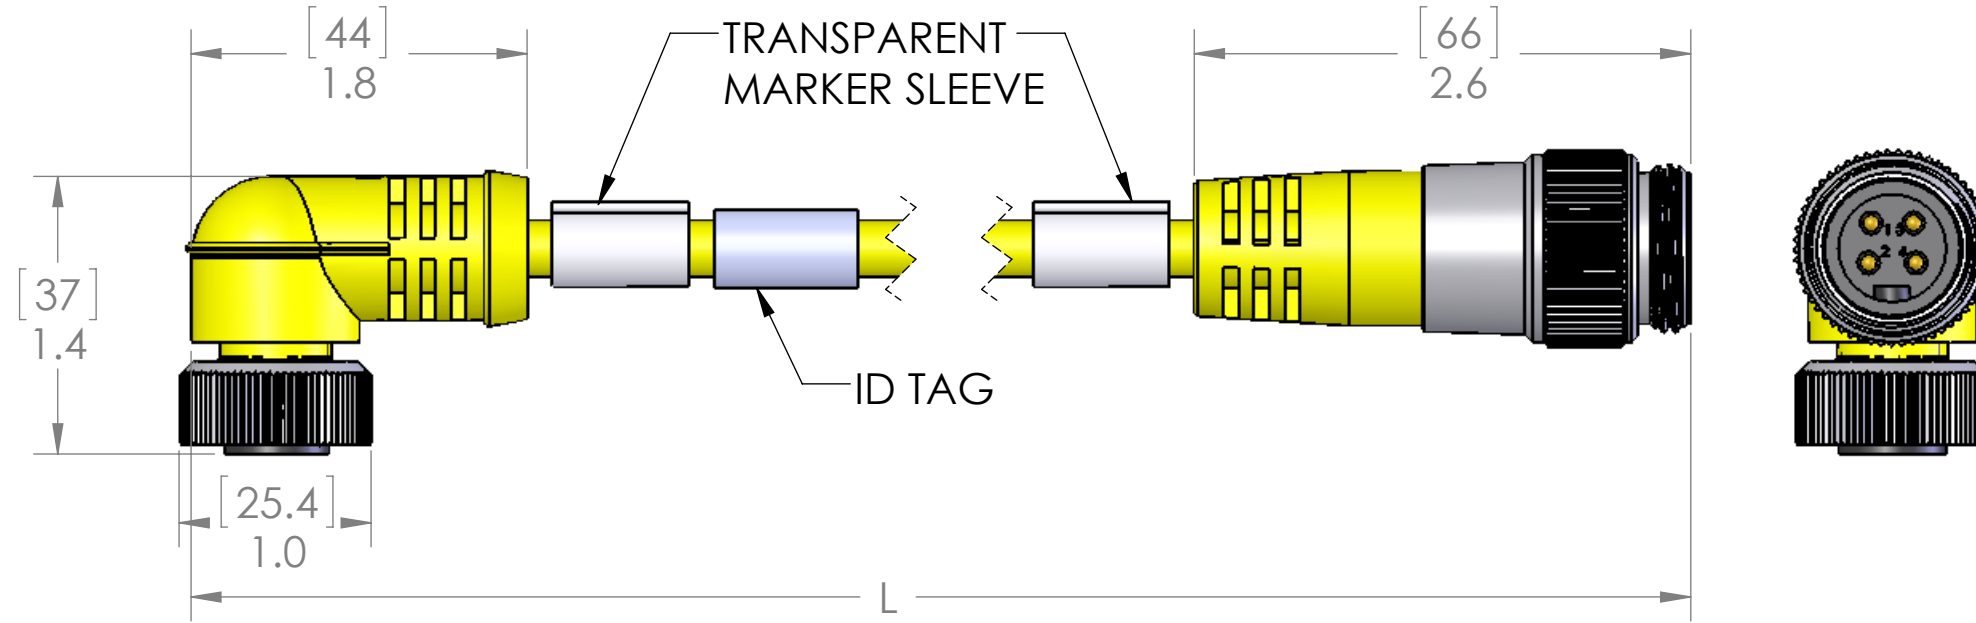

P/N	L
MINCW-4MFRPX-1M-SB50	40" [1m]
MINCW-4MFRPX-2M-SB50	79" [2m]
MINCW-4MFRPX-3M-SB50	118" [3m]
MINCW-4MFRPX-4M-SB50	157" [4m]
MINCW-4MFRPX-5M-SB50	197" [5m]
MINCW-4MFRPX-6M-SB50	236" [6m]
MINCW-4MFRPX-10M-SB50	393" [10m]
MINCW-4MFRPX-15M-SB50	590" [15m]

MATERIALS:	
BODY:	YELLOW PVC, 105°C OIL RESISTANT
INSERTS:	BLACK PVC, 105°C OIL RESISTANT
CABLE:	18/4 AWM YELLOW 105°C OIL RESISTANT
COUPLING:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES AND [MM]
 MATERIAL
 FINISH
 DO NOT SCALE DRAWING

NAME	BEM
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MINCW-4MFRPX-ZZ-SB50	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1