

FEM	Wiring	MAL
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	3/14/2016	JJH

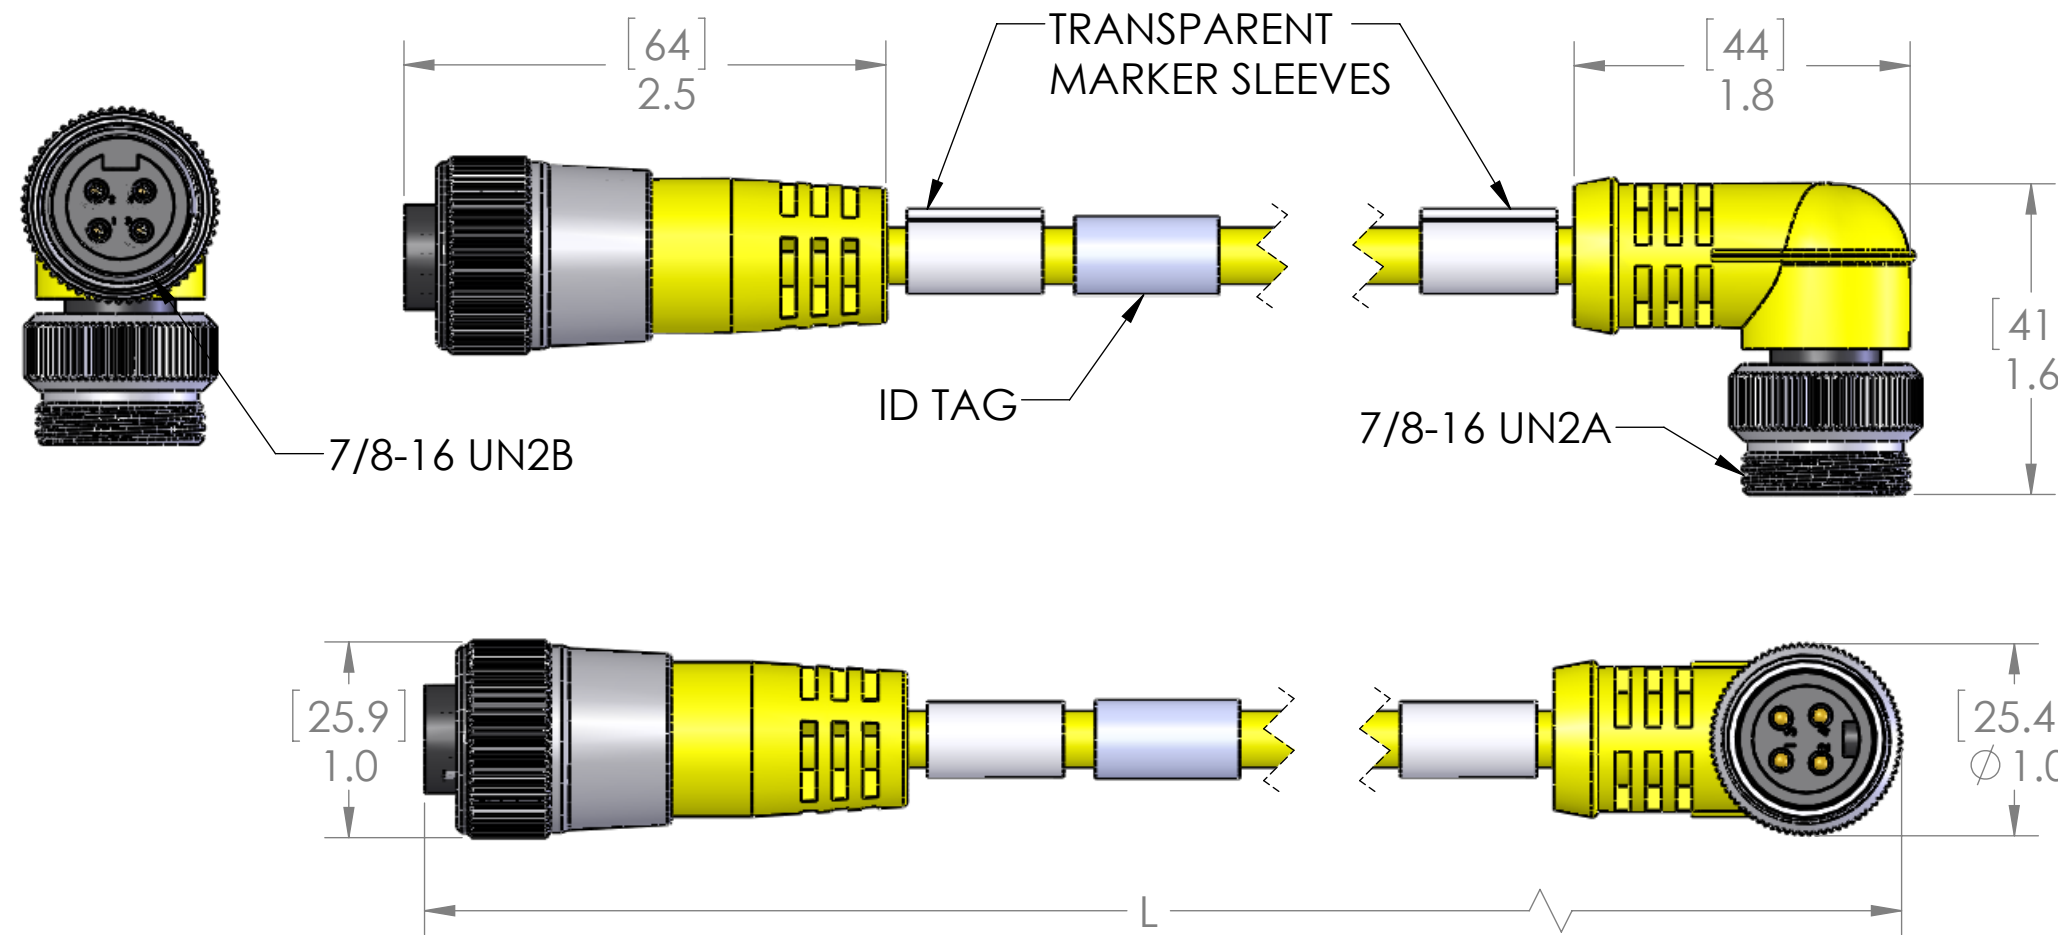


TABLE A	
P/N	L
MINCW-4MRFPX-1M-SB50	40" [1m]
MINCW-4MRFPX-2M-SB50	79" [2m]
MINCW-4MRFPX-3M-SB50	118" [3m]
MINCW-4MRFPX-4M-SB50	157" [4m]
MINCW-4MRFPX-5M-SB50	197" [5m]
MINCW-4MRFPX-6M-SB50	236" [6m]
MINCW-4MRFPX-10M-SB50	393" [10m]
MINCW-4MRFPX-15M-SB50	590" [15m]

MATERIALS:	
BODY:	YELLOW PVC, 105°C OIL RESISTANT
CABLE:	18/4 YELLOW TPE CABLE
COUPLING:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	105°C

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES AND [MM]
 MATERIAL
 FINISH
 DO NOT SCALE DRAWING

NAME	BEM
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MINCW-4MRFPX-ZZ-SB50	A

SCALE: 1:1 WEIGHT: SHEET 1 OF 1