



SPECIFICATIONS

Model		CLE-24
Rated voltage		24V DC (non-polar)
Operating voltage		Rated voltage \pm 10%
Power consumption		3W
Light source	LED	24-LED of white high intensity
	Luminous intensity (at optical center)	20cd
Mounting	Place	Indoor or outdoor
	Direction	Upright, horizontal and sideways
Operating temperature range (Relative humidity)		-25°C ~ +60°C (90%RH or less)
Protection rating		IP65f conformity
Vibration proof		19.6 m/s ² (30Hz)
Mass		0.3kg

No.CLE-24-A18A-1/2

<Irradiation pattern (Referential data)>

(Relative luminosity)

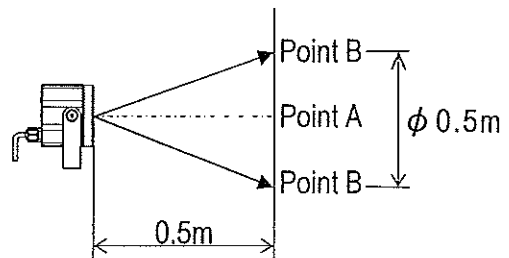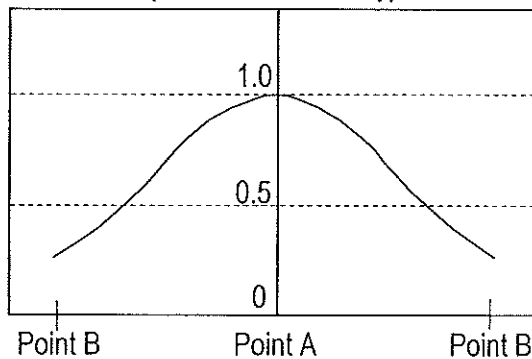

PATLITE Corporation


App.by	Chk.by	Drn.by
M.Yoshida	S.Chihaya	Y.Nagayama
16 Nov '05	16 Nov '05	10 Nov '05

SPECIFICATIONS



Model		CLE-24N
Rated voltage		24V DC (non-polar)
Operating voltage		Rated voltage \pm 10%
Power consumption		3W
Light source	LED	24-LED of white high intensity
	Luminous intensity (at optical center)	130cd
Mounting	Place	Indoor or outdoor
	Direction	Upright, horizontal and sideways
Operating temperature range (Relative humidity)		-25°C ~ +60°C (90%RH or less)
Protection rating		IP65f conformity
Vibration proof		19.6 m/s ² (30Hz)
Mass		0.3kg

No.CLE-24N-A18A-1/2

※The LED radiation emitted from this product is classified as CLASS 2. (IEC60825-1:2001)

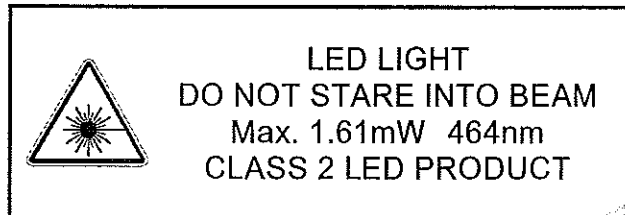

〈Irradiation pattern (Referential data)〉
 (Relative luminosity)

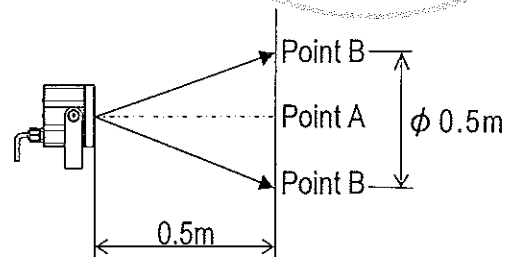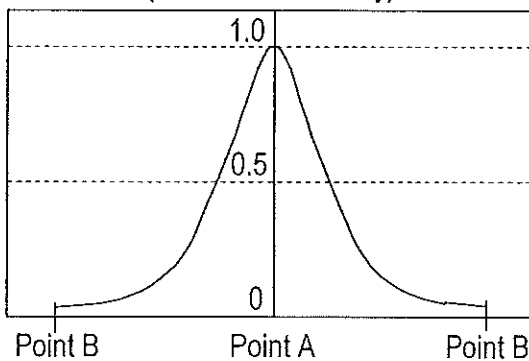

PATLITE Corporation

App.by

Chk.by

Drn.by

M.Yoshida

S.Chihaya

Y.Nagayama

16 Nov '05

16 Nov '05

10 Nov '05