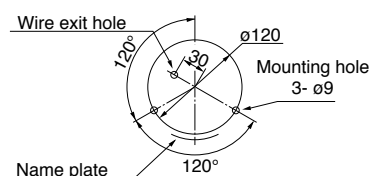# XP

Signal Light

Xenon

ø162

IP23

Corrosion-proof plastic Signal Light with triple flashing.

· Newly Developed Prism Cut Lens: For bright illumination and improved visibility from all directions.
· Superior Visibility: Intensive flashing using a xenon lamp (night-time visibility: 1,000m or more).
· Extended Bulb Life: Shock resistant xenon, even under severe vibration.
· Installation: Indoors—upright, inverted, sideways; Outdoors—upright only.
· Main Body: Impact and heat resistant ABS resin.
· Lens: Superior weather resistant and light translucent AS resin.
· Available Colors: Red, Amber, Blue.

Dimensions

Mounting Dimension

Wire exit hole

ø120

Mounting hole
3- ø9

Name plate

120°

190
203
61
19

3-M8
ø162

XP Type

Model	Rated Voltage	Current	Flashes per Minute	Mass
XP-12	12V DC	1.4A		
XP-24	24V DC	0.7A	110	1.3kg
XP-100	100V AC	0.4A		
XP-220	220V AC	0.2A		1.2kg

Inrush current of this product is very high. Please check the outer contact capacity.