

# WG



## MP3 compatible annunciator with LED Signaling Light




- 90dB at 1m**  
(Actual sound level may vary depending on sound type.)
- 32 Second**
- 3 messages**
- NPN Open Collector**

The WG series is wall mountable and will easily blend into any environment such as hospitals, airports and office buildings, providing audible messages and visual signal with LED.


- Colors available: red, yellow, green, blue and clear/white.
- Alert operators or the public with voice messages or chimes or any other sound and flashing LED light.
- Effective for audio/visual guidance at public facilities such as train platforms, bathrooms, etc.
- Record your own messages using Patlite's Playlist Editor, and MP3 sound files or use Patlite's custom recording services.
- High quality sound with a max. output of 90dB (at 1m) provide clear messages, even in a crowd.
- 3 message channels for various applications.  
One channel has priority for emergency/security purposes.
- Has 3 messages for a total of 32 seconds.
- NPN open collector transistor compatible
- 12V DC or 90-250V AC



## Dimensions

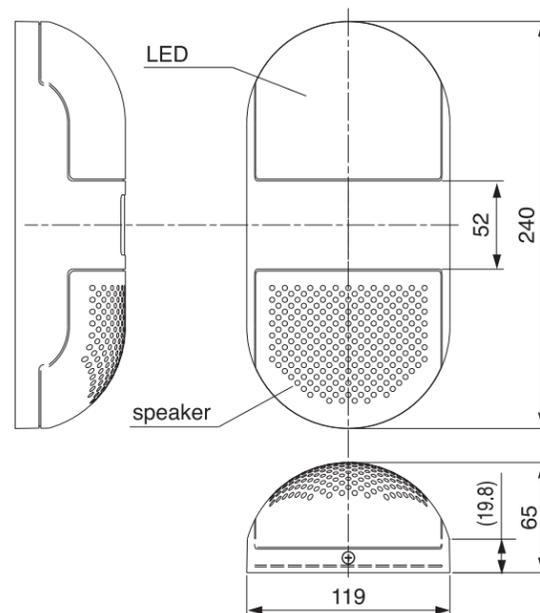

## How to Order

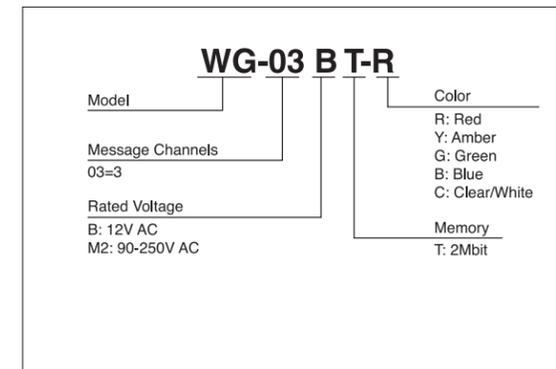

## WG Type

Model	WG-03BT	WG-03M2T
Rated Voltage	12V DC (No Polarity)	90-250V AC
Power Consumption: Standby	1Watt	1Watt
Power Consumption: Operation	6Watt Max	6Watt Max
Lens Colors Available	None, Red, Amber, Green, Blue	None, Red, Amber, Green, Blue
Operating Temperature Range	-10°C~+60°C	-10°C~+60°C
Volume	90dB at 1m (Adj.from zero)	90dB at 1m (Adj.from zero)
Message Memory Capacity	32 seconds @ 64kbts/sec	32 seconds @ 64kbts/sec
No. of Messages (Inputs)	3	3
Protection Rating	IP20	IP20
Illuminance	300lx at 50cm	300lx at 50cm
Mounting Direction	Horizontal, Vertical (Up or Down)	Horizontal, Vertical (Up or Down)
Vibration Resistance	19.6m/s <sup>2</sup>	19.6m/s <sup>2</sup>
Mass	600g	600g