

# Request Form - Belt Conveyor

## Customer Information

Date:

Company:

Contact person:

Telephone number:

E-Mail address:

Quotation submittal:

## Belt Conveyor

Number of conveyors [pcs]:

Frame width [mm]:


Total length [mm]:

Speed [m/min]: ☐ Constant \_\_\_\_\_ ☐ Adjustable from \_\_\_\_\_ to \_\_\_\_\_

Speed controller: ☐ Yes (unwired, supplied loose) ☐ No

Total load / conveyor [kg]:

Side guides: ☐ Yes ☐ No

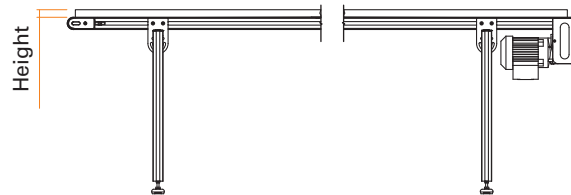

Height [mm]: \_\_\_\_\_

Ambient temperature [°C]:

Material temperature [°C]:

## Drive and Idler

☐ Standard voltage: Δ 230V / Y 400V, 50 Hz ☐ Special voltage: \_\_\_\_\_

☐ Cycle operation: Cycle/min \_\_\_\_\_ Run time [s] \_\_\_\_\_ Distance [mm] \_\_\_\_\_

Accumulation: ☐ Yes ☐ No

Transport direction: ☐ Pulling ☐ Pushing ☐ Reversing

Drive type: \_\_\_\_\_



Detailed description in our Robotunits catalogue, section Conveyor Technology.

Transported goods: \_\_\_\_\_

Belt properties:


☐ Adhesive ☐ Accumulating ☐ Cut-resistant ☐ Food-safe ☐ Electrically conductive  
☐ UV-resistant ☐ Chemical-resistant ☐ Oil-resistant ☐ Other: \_\_\_\_\_

# Request Form - Belt Conveyor

## Drive and Idler


Motor position:

- ☐ 0°  
☐ 90°  
☐ 180°  
☐ 270°



Terminal box position:

- ☐ 0°  
☐ 90°  
☐ 180°  
☐ 270°



Thermal contact: ☐ Yes

☐ No

Thermal sensor: ☐ Yes

☐ No

## Support Frame

☐ Yes (assembled)

☐ Yes (supplied loose)


☐ No

Start height [mm]: \_\_\_\_\_

End height [mm]: \_\_\_\_\_

Total length [mm]: \_\_\_\_\_

Incline [°]: \_\_\_\_\_

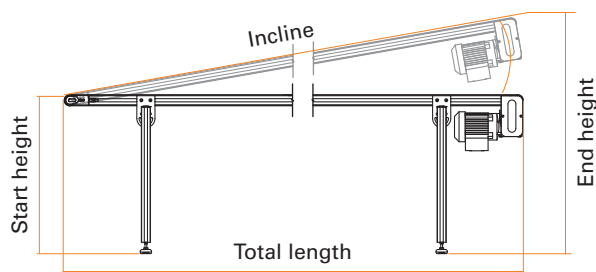


Foot type:

☐ S



☐ H



## Information / Sketch